

PreView® Has Your Blind Spot Covered

VEHICLE TYPE: CONCRETE TRUCK / CEMENT MIXER

proudly developed by




- ▶ Reduce Blind Spot Accidents
- ▶ Actively Detect Objects
- ▶ Easily Installed

Mount the rear object display on the center of the cab. Mount the Side Object Display onto the right side pillar.

One High Resolution PreView® sensor mounted on the rear of the cement truck. One PreView® Side Object Detection sensor mounted on right side.



NIOSH BLIND SPOT CHART

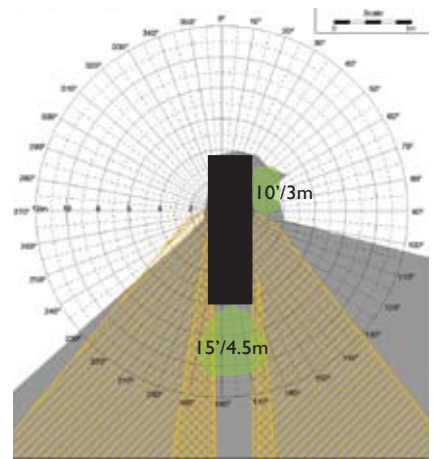

Vehicle
 Blind Spot
 PreView Coverage Area
 Convex Mirror Visibility
 Flat Mirror Visibility

Available Options: Replace in-cab LED display with PreView Plus camera and monitor system. Superimposes object detection indicators directly on to monitor and will support up to 4 cameras.



www.aps-supply.com

DIMENSIONS	SUGGESTED CONFIGURATION	SPECIFICATIONS
High Res Sensor: 4.13" (h) x 4.95" (w) x 1.7" (d)	SUGGESTED:	Op. Temps: -40° – +185°F / -40° – +85°C
SOD Sensor: 4.36" (h) x 9.25" (w) x 1.6" (d)	High Resolution PreView: 15' / 4.5m	Current Draw: < 1/2 AMP
	PreView Side Object Detetion	

To determine the best configuration to fit your specific vehicle and site conditions, please call 08 9248 4419, visit www.aps-supply.com, or email sales.apsa@aps-supply.com to speak to a Blind Spot specialist.