



5-Character LED Vehicle Identification Display Board (VID)

With Traffic Alert

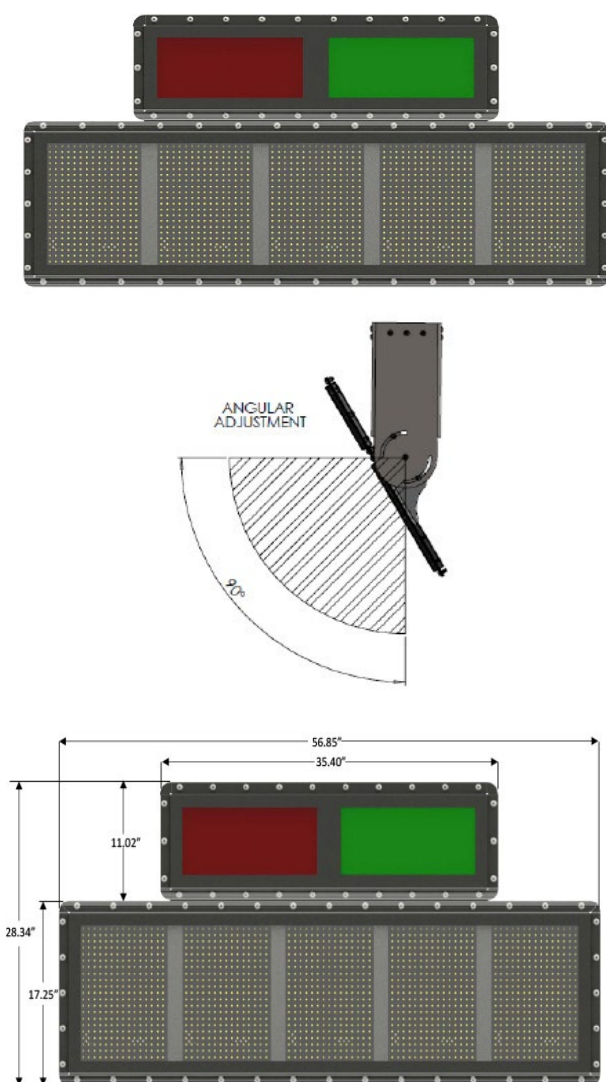

Mounting Options

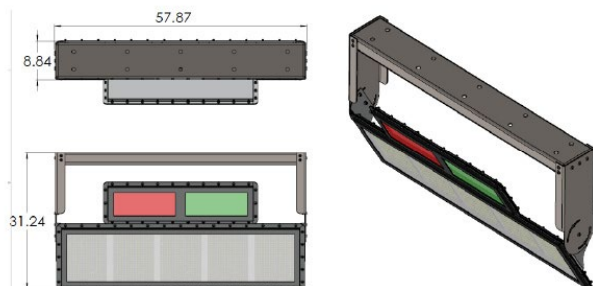

- Ceiling, Floor or Wall mount option
- Custom design for full 90°visibility
- Hardware is included and easy to install
- Mounting method will vary by display type

Description

The 5-character LED VID with traffic alert by APS is built on the same durable and robust design as the other VID products. This unit includes the additional red and green traffic alert system and 5 character LED display, which is visible for up to 152.4m (500ft). Designed for 24 hour use: the Vehicle ID Display is programmed for brighter illumination in the daytime and a sensor dims the LED output for nighttime use.

This LED VID can be programmed via a Magnetic Reed Switch and, once programmed, the numbers or letters use Locking technology and do not need reprogramming upon shut down and startup. APS has built-in Secure Protection technology, which ensures safe-site operation by preventing VIDs from displaying incorrect characters. Super-sealed internally as well as externally with an water ingress rating of IP66 and IP67, this VID is protected from dirt, moisture, high-pressure washing and vibration, whilst external damage to your VID will not affect its continued operation.

Features and Benefits

- Reverse polarity protected
- Integrated Photo Cell Sensor for Day and Night visibility
- Automatically: Dims for night use & avoiding glare. Brightens for daytime use
- Magnetic Reed Switch Programmable Technology
- Locking technology and do not need reprogramming upon shut down and startup
- Solid State LEDs, withstand shock & vibration
- Light weight and easy to install
- Impact resistance & withstands power hose cleaning
- Built to withstand extreme vibration and environment
- Rated IP66 & IP67
- Visible up to 500 feet
- Available in 12-24 V DC, 110V AC (and 220V AC upon request)

Applications

Mining, Construction

Tech Specs

Digits	5 characters
Character Height	304mm (12 inch)
Visibility	500 ft (152.4m)
Voltage	12-24V DC, 110V AC, 220V AC upon request
Dimensions (DxWxLxH)	1.26x56.85x28.34" (32x1444x719.8mm)

Part No.	Description
VID-5C12T-ARG	APS 5-character LED Vehicle Identification Display with Traffic Alert



Authorised Importer and Master Distributor

