


Speaker 538 LED Strobe Light

3" Round Pipe Mount

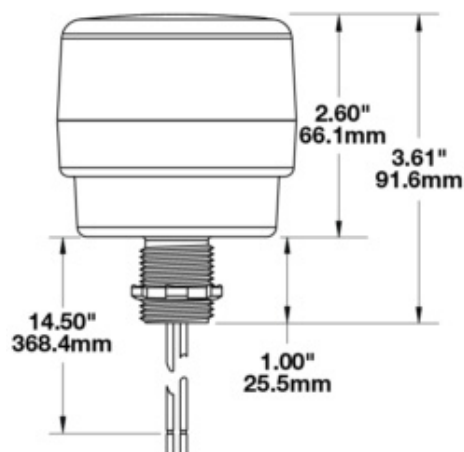

Description

This highly-visible LED strobe light features a pipe mount, acrylic lens which resists scratching and scuffing, and sleek, low-profile design. Using solid optic design with a single LED, the Model 538 utilizes multiple LED colours instead of coloured lenses, giving you a cleaner, tidier package with improved performance!

Features

- Available in a variety of colors
- Utilizes multiple LED colors instead of colored lenses
- Also available in a flange mount

Application

Construction, agriculture, Industrial, material handling, mining, railroad, specialty vehicles, trucks and buses

Tech Specs

Type	LED Strobe Light
Colours Available	Amber, Red, Green, Blue, White
Beam Pattern	Warning - Strobe
Class	Class III
Flash Rate	60 +/- 10 fpm
Input Voltage	12-80V DC
Operating Voltage	12-80V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	0.26A @ 12V DC, 0.09A @ 48V DC, 0.08A @ 80V DC
Shape	Round
Outer Lens Material	Clear Acrylic
Housing Material	Polycarbonate
Housing Color	Black
Mounting Type	Pipe Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	13.5" Bare Leads
Weight	0.30 lbs / 0.14 kgs
Dimensions (DxWxH)	2.8x2.8x3.6" (71x71x91.6mm)

Part No.	Class	Colour	Flash Rate	Voltage	Amps (12V)
539-A	Class III	Amber	60 +/- 10 fpm	12-80V DC	0.26A
539-R	Class III	Red	60 +/- 10 fpm	12-80V DC	0.26A
539-G	Class III	Green	60 +/- 10 fpm	12-80V DC	0.26A
539-B	Class III	Blue	60 +/- 10 fpm	12-80V DC	0.26A
539-W	Class III	White	60 +/- 10 fpm	12-80V DC	0.26A



Authorised Importer and Master Distributor

