
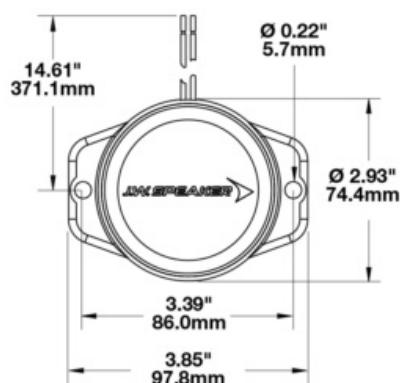


# Speaker 539 LED Strobe Light

## 3" Round Flange Mount

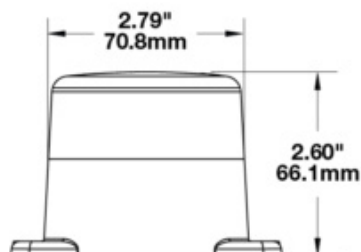

### Description

The Model 539 LED strobe light is durably designed with an acrylic lens which resists scratching and scuffing, and sleek, low-profile design. Using solid optic design with a single LED, this industrial strobe light utilises multiple LED colours instead of coloured lenses, giving you a cleaner, tidier package with improved performance!

### Features

- Available in a variety of colours
- Utilises multiple LED colours instead of coloured lenses
- Flange mount provides easy installation
- Also available in a pipe mount

### Application

Construction, agriculture, Industrial, material handling, mining, railroad, specialty vehicles, trucks and buses

### Tech Specs

Type	LED Strobe Light
Colours Available	Amber, Red, Green, Blue, White
Beam Pattern	Warning - Strobe
Class	Class III
Flash Rate	60 +/- 10 fpm
Input Voltage	12-80V DC
Operating Voltage	12-80V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	0.26A @ 12V DC, 0.09A @ 48V DC, 0.08A @ 80V DC
Shape	Round
Outer Lens Material	Clear Acrylic
Housing Material	Polycarbonate
Housing Color	Black
Mounting Type	Flange Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	13.5" Bare Leads
Weight	0.30 lbs / 0.14 kgs
Dimensions (DxWxH)	2.9x3.85x2.6" (74.4x98x66mm)

Part No.	Class	Colour	Flash Rate	Voltage	Amps (12V)
539-A	Class III	Amber	60 +/- 10 fpm	12-80V DC	0.26A
539-R	Class III	Red	60 +/- 10 fpm	12-80V DC	0.26A
539-G	Class III	Green	60 +/- 10 fpm	12-80V DC	0.26A
539-B	Class III	Blue	60 +/- 10 fpm	12-80V DC	0.26A
539-W	Class III	White	60 +/- 10 fpm	12-80V DC	0.26A



Authorised Importer and Master Distributor

