

SPEAKER 4416

Handheld LED Work Light



Description

The Model 4416 handheld LED work light takes the power and durability of the Model 4415 spot light to a new level of portability! The ergonomic handle and low profile design make the Model 4416 not only easy to grasp and carry, but also ideal for laying on the ground for tasks such as vehicle inspections or oil changes.

The compact design also lends itself well to storing the Model 4416 under the seat or in a cup holder for easy access. The coiled power cord stretches up to 12 feet and plugs into your vehicle's cigarette lighter (12-24V). The Model 4416 handheld LED work light combines high performance optics, rugged durability and compact design, making it ideal for forestry, rail, power sports and specialty vehicles.

Features and Benefits

- 1,350 effective lumens of bright, white light for maximum visibility
- New ergonomic handle fits gloved hand
- Compact size, designed to fit into vehicle cup holder
- 6' long 12-24V vehicle power cord that stretches up to 12' in length
- Additional vehicle power cord with battery clips & nylon carrying bag

Applications

Mining, industrial, construction, agriculture, material handling, railroad, 4WD, specialty vehicles, trucks and buses



Tech Specs

Light Source	LED
eLumens	1,350 Lu
rLumens	2,450 Lu
Colour Temperature	5000K
Beam Pattern	Spot
Current Draw	2.20A @ 12V DC 1.10A @ 24V DC
Voltage	12-24V DC
Operating Temperature	-40°C to +40°C
Shape	Round
Housing	Black die-cast aluminium
Lens	Hardcoated polycarbonate
Lens Color	Clear
Electrical Connection	Deutsch DT04-2P-E008
IP Rating	IP67
Mounting	Handheld

Additional Information
 Light Includes:
 1 x 6 ft (1.83m) long coiled 12-24V vehicle power cord, stretching up to 12 ft (3.66m) in length
 1 x 3 ft (0.914m) long 12-24V vehicle power cord with alligator clips

Dimensions (DxWxH) 2.54x3.35x7.52" (64.4x85x191mm)

Part No.	Description
4416HH	Speaker 12-24V handheld work light with spot beam pattern

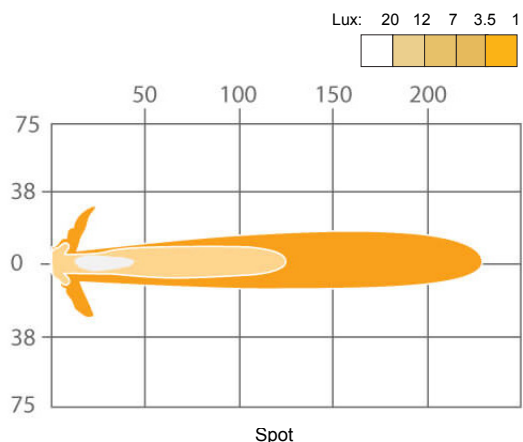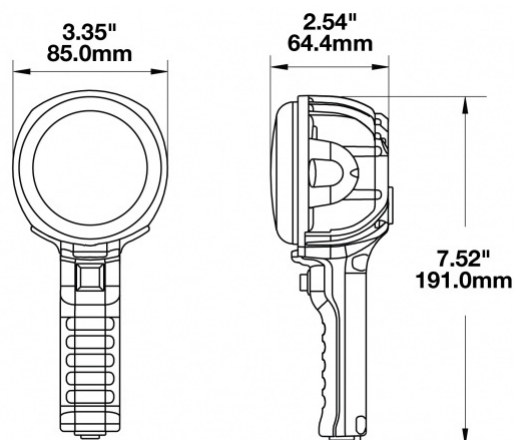

Authorised Importer and Master Distributor

