

Speaker 4415 Sideview Mirror – 2 Light Kit



Description

This sideview mirror 2-light kit by JW Speaker is perfect for illuminating the places normal reverse lights don't reach, making reversing into difficult corners or unlit areas such as loading docks and construction sites a breeze. This new kit uses the existing Speaker A4415 LED work light with a new pre-assembled shroud. Kit includes two lights, with a shroud mounted in right-hand and left-hand orientations.

Speaker A4415 Side View Light Kit Utilising the powerful A4415 LED work light with a spot beam pattern, this new kit is intended to be mounted on the side mirrors or forward of the driver with the shroud (snoot) oriented to block the light from the driver / operator's eyes, providing maximum visibility rearward. The kit can also be mounted elsewhere on the truck, such as on the back or side of a sleeper cab, to provide additional lighting. Combining high performance optics, light weight design and new shroud for maximum visibility, the A4415 Side View Mirror Kit is ideal for commercial trucks & buses.

Features and Benefits

- 1,350 effective lumens of bright, white light for maximum visibility
- Pedestal mount provides easy install for side view mirrors or sides of rear cab bunk
- Shroud blocks light from getting inside the cab, eliminating any light directed toward the driver
- Kit includes 2 lights and necessary mounting hardware
- Available in spot beam pattern

Applications

Long-haul trucks, railroad, speciality trucks, commercial trucks and buses


Tech Specs

Light source	LEDs
Colour Temperature	5000K
eLumens	1,350 Lu
rLumens	2,450 Lu
Beam	Spot, Trapezoid
Voltage	12-24V DC
Draw	2.20A @ 12V DC, 1.10A @ 24V DC
Operating Temperature	-40°C to +40°C
Housing	Black die-cast aluminium
Lens	Hardcoated polycarbonate
Electrical Connection	Integral connector in housing simulating Delphi
IP Rating	IP67
Mounting	Pedestal with (x1) bracket and swivel
Weight	0.9 (lbs) / 0.41 (kgs)
Dimensions (DxWxH)	2.24x3.35x4.94" (56.9x85.1x125.48mm)

Part No.	Voltage	Amps (24V)	Watts
4415-SVMKIT	12-24V DC	2.20A @ 12V DC, 1.10A @ 24V DC	26W



Mounting Options

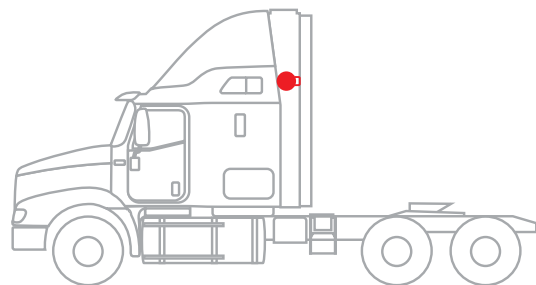

Authorised Importer and Master Distributor

