


Speaker 9800

LED Non-Heated Headlight - 2 Light Kit

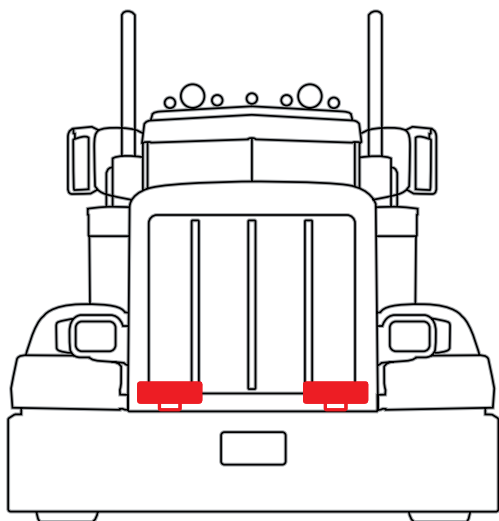

Description

The JW Speaker 9800 12-24V DOT LED Non-Heated Headlight – 2 Light Kit is designed to provide a universal, multi-function headlight for on-highway use. This all-in-one, low-profile, bolt-on solution delivers a level of flexibility that makes it an excellent headlight choice for nearly any vehicle, including applications in: agriculture, construction, mining, specialty trucks, trucks and buses.

Features and Benefits

- 2,880 raw lumens (high beam); 2,160 effective lumens (high beam)
- 1,150 raw lumens (low beam); 800 effective lumens (low beam)
- Beam Pattern(s): Forward Lighting (high beam), (DOT/ECE), Forward Lighting DOT (low beam), Signalisation – Turn (Front)
- UV-resistant polycarbonate lens
- Xenoy housing provides maximum protection
- Rugged solid state LEDs can withstand shock & vibration
- Universal pedestal mount
- Mounting Hardware: (x4) M8 – 1.25-80 mm x 25 mm SS carriage bolt
- 6-Pin Delphi connector

Applications

Agriculture, construction, mining, specialty trucks, trucks and buses

Tech Specs

LEDs	LEDs
Colour Temperature	5000K
eLumens	1,150 Lu (high beam); 800 Lu (low beam)
rLumens	2,880 Lu (high beam); 2,160 Lu (low beam)
Beam	Forward Lighting (high beam), (DOT/ECE), Forward Lighting DOT (low beam), Signalization - Turn (front)
Voltage	12-24V DC
Draw	2.70A @ 12V DC (low beam) 3.60A @ 12V DC (high beam) 0.85A @ 12V DC (turn signal) 0.10A @ 12V DC (DRL) 2.50A @ 24V DC (low beam) 4.00A @ 24V DC (high beam) 0.50A @ 24V DC (turn signal) 0.10A @ 24V DC (DRL)
Housing	Xenoy
Lens	Clear polycarbonate
Rating	IP67
Mounting Hardware	(x4) M8 - 1.25-80 mm x 25 mm SS carriage bolt
Mounting Type	Universal pedestal mount
Wiring	6-Pin Delphi
Weight	15 (lbs) / 6.8 (kgs)
Dimensions (DxWxH)	5.24x11.48x3.72" (133.2x291.6x94.5mm)

Part No.	Description	Voltage
9800HL-DOT	Speaker 9800 Series 12-24V DOT High / Low LED Headlight – 2 Light Kit	12-24 V DC

Authorised Importer and Master Distributor

