


LY400 Series LED Emergency Linear Light


[Click for APS Website](#)




Bulkhead-mount model (LY400-B-22W)

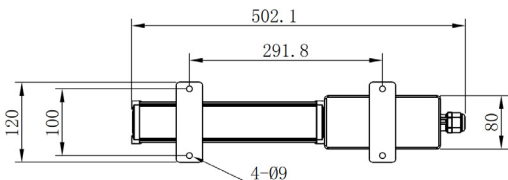

Pole-mount model (LY400-P-22W)

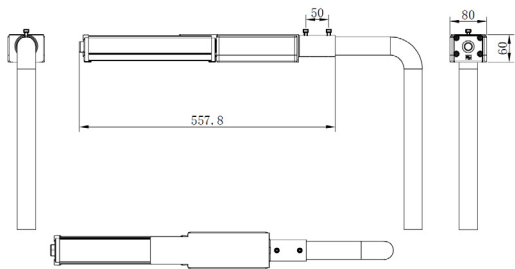

Pole-mount Green LED model (LY400-P-22W-GRN)

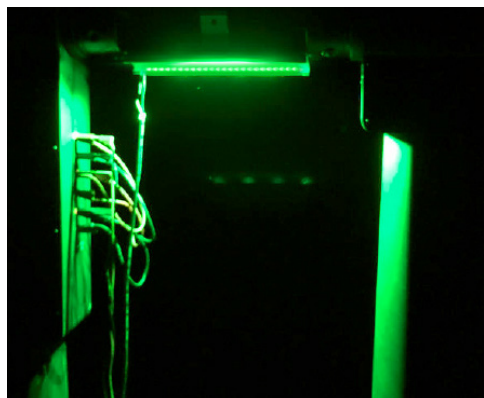

LED Walkway Light with Emergency Backup

The LY400 Series LED linear light is designed for walkways, conveyor systems and pathways. When used with the flat (bulkhead) mount, this light can be used as an LED replacement of fluorescent and bulkhead lighting, whilst the pole (spigot) mount can be used as an LED replacement for conveyor and pathway lighting. Outputting an impressive 2200 Lumens from only 22W, it features a one-for-one replacement for 70W HID lights. The LY400 is also available in the Green LED model for eye-wash stations and also to replace fluorescent fixtures (e.g. LED upgrade).

Features

- Industrial-grade LED chips and driver
- 2200 effective Lumens
- One-for-one replacement for 70W HID fixtures
- Tempered glass effective against aging and colour-changing
- IP65 fixture, waterproof & shock resistant
- Wide 140° optical lens provides even light distribution
- Certificates: CE, RCM (APS Lighting & Safety - E1496)
- Minimum Emergency backup time is 90 minutes

Application: Walkways, Corridors, Conveyors and Pathways, Eye-wash stations (Green LED model)

Tech Specs

Type	LEDs
Lumens	2200 eLu, 2600 eLu (Green LED model)
Color Temperature	5500K-6000K
Voltage	120~240V AC (50Hz~60Hz)
Wattage	22W
Beam Angle	140°
Humidity	10% ~ 95% (no coagulation)
Operating Temperature	-30°C to +60°C
IP Rating	IP65
Housing	Forged aluminum alloy
Lens	Tempered glass
Mount	Pole (spigot), Flat (bulkhead)
Weight	2.0 kg (4.41 lbs)

Part No.	Beam	eLumens	Voltage	Watts	Mount
LY400-P-22W	140°	2200 eLu	120~240V AC	22W	40mm pole (spigot mount) with 5m cable
LY400-B-22W	140°	2200 eLu	120~240V AC	22W	Flat bracket (bulkhead mount) with 5m cable



Eye-wash Station LED Green Light with Emergency Backup

Features

- Green light model for use in eye-wash stations
- Industrial-grade LED chips and driver for optimal light efficiency and stability
- 2600 effective Lumens
- LEDs provides high luminous output for 22W
- Tempered glass effective against aging and colour-changing even after long use
- IP65 fully-sealed fixture, waterproof & shock resistant
- Wide 140° light beam coupled with angled mounting bracket and wide optical lens
- provides even light distribution - reducing dark areas between lights
- Minimum emergency backup time is 90 minutes

Application: Eye-wash stations (Green LED model)

Part No.	Beam	eLumens	Voltage	Watts	Mount
LY400-P-22W-GRN	140°	2600 eLu	120~240V AC	22W	40mm pole (spigot mount) with 5m cable
LY400-B-22W-GRN	140°	2600 eLu	120~240V AC	22W	Flat bracket (bulkhead mount) with 5m cable

Authorised Importer and Master Distributor

