


ECCO 600 Tonal Back-up Alarm Series

Surface Mount

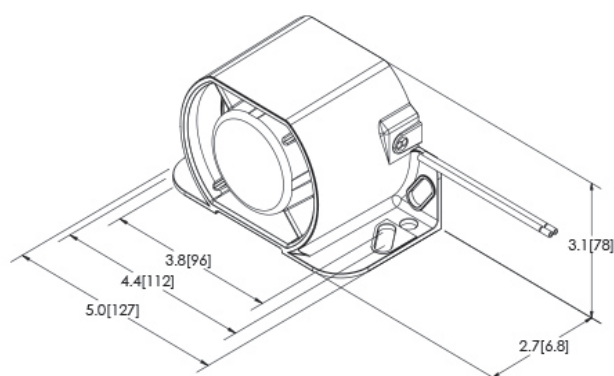

Description

Designed to meet all the harsh operational requirements of any fleets equipment, ECCO 600 Series alarms feature a reverse-mounted speaker design and reinforced nylon housing providing unrivalled durability. These alarms are so robust that an ECCOLIFE™ warranty covering the alarm for the life of the vehicle is offered on all models. Smart Alarm® models measure ambient noise and adjust their sound level, creating a volume that is safe without being annoying or contributing to noise pollution. Smart Alarms eliminate the need for constant manual adjustment and help prevent intentional alarm disconnection.

Features and Benefits

- Reverse-mounted speaker enhances sound and protects the speaker from dust and moisture ingress
- Reinforced nylon housing eliminates corrosion damage
- Sealed in epoxy for protection against dust, moisture, and vibration
- Steam cleanable and pressure washable
- Works on positive or negative ground systems
- Temperature Range: -40°F to +185°F (-40°C to +85°C)

Tech Specs

Type	Tonal Alarm Smart Series
Voltage	12-48V DC (SA931N, SA901N) 12-36V DC (610N, 630N)
Decibels	82-102Db (SA931N, SA901N) 97Db (610N) 107Db (630N)
Amps	0.2A (SA913N) 0.3A (SA901N) 0.4A (610N) 1.2A (630N)
Standards Compliances	SAE Type F (SA931N), SAE Type C (610N), SAE Type B (630N), AMECA (610N, 630N), CE, R10, UL, IP64
Warranty	ECCO LIFE

Part No. Description

630N	12-36V DC, 107 Db, 1.2A @ 12V DC, SAE Type B, CE, R10, UL, IP64, AMECA
610N	12-36V DC, 107Db, 1.2A, SAE Type B, CE R10, UL, IP64, AMECA
SA931N	Smart Alarm, 12-48V DC, 82-102Db, 0.2A, SAE Type F, CE, R10, UL, IP64
SA901N	Smart Alarm, 12-24V DC, 82-107Db, 0.3A, CE, R10, UL, IP64



Authorised Importer and Master Distributor

