

# ECCO 6262 Series

## SAE Class III LED



### Description

ECCO's maintenance-free 6262 Series LED Beacons feature three of the latest LEDs and Pulse8 flash operation, producing a warning signal ideally suited to industrial applications. This cost effective unit has a wide operating range of 12-80V, making it the perfect light for use on electric vehicles. The long, trouble-free service life and low amp draw characteristics of LED technology make this an ideal replacement solution for rotating or strobe beacons.


### Features and Benefits

- 12-80 VDC, 0.12 Amps
- Pulse8 flash operation, 8 flashes per cycle (70FPM)
- Reinforced nylon base with epoxy-sealed electronics provides superior environmental protection
- Thread-on polycarbonate lens
- Reverse polarity, voltage spike and surge protected
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

### Tech Specs

Voltage	12-80V DC
Flash Pattern	80 FPM X8
Approval	SAE CLASS III, UL, CE, R10, IP66/67, ROHS
Height	4.9 inches (124mm)
Width	3.9 inches (99mm)
Mount	2 Bolt or 1/2 Pipe
Colour	Amber, Blue, White, Green or Red
Warranty	5 Years

Part No.	Description
6262A	Amber, 2 Bolt Mount, Side Wire Exit
6262B	Blue, 2 Bolt Mount, Side Wire Exit
6262G	Green, 2 Bolt Mount, Side Wire Exit
6262R	Red, 2 Bolt Mount, Side Wire Exit
6262C	Clear, 2 Bolt Mount, Side Wire Exit
6263A	Amber, 2 Bolt Mount, Bottom Wire Exit
6267A	Amber, 1/2" Pipe Mount
6267B	Blue, 1/2" Pipe Mount
6267G	Green, 1/2" Pipe Mount
6267R	Red, 1/2" Pipe Mount
6267C	Clear, 1/2" Pipe Mount

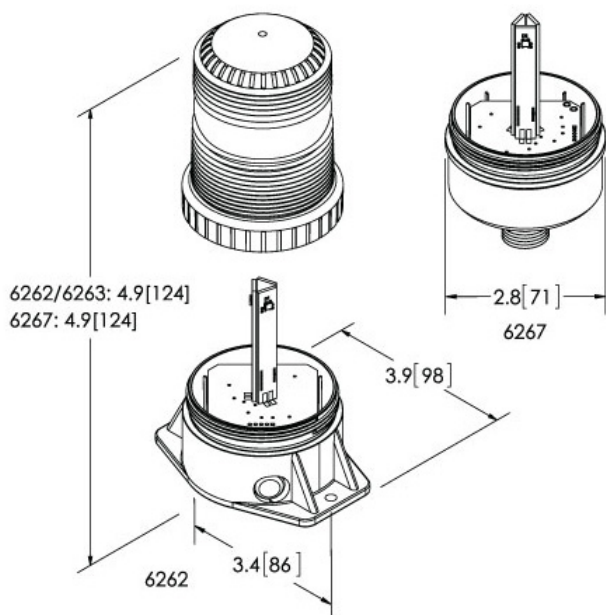

Authorised Importer and Master Distributor

