


LSGM40 AC Dark Skies Series

10W Junction Box



Mounting Options

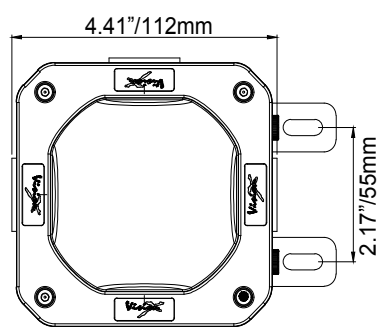

Standard Mount Feet

Description

The 10-Watt fixture is designed with a painted bezel to eliminate light bleed. Unlike tradition fixtures, LEDs consume less power while emitting effective lumens, are more flexible with light content, and do not require a warm-up period resulting in wasted energy. Vision X LED fixtures are enhanced with Pulse Width Modulation (PWM) technology achieving a 50,000+ hour lifespan.

Features and Benefits

- Easy Pole or Ceiling Mounting Options Available
- Color Temperature: 2800K
- Wattage: 10W
- 15.6 Grms Vibration Rating
- Operating Voltage: 90-264VAC | 127-370V DC
- IP-68, IP69K
- Beam Patterns Available: 180° Ultra Wide Flood

Applications

Structural

Tech Specs

Type	40 x 5630 (LG) LEDs
Beam Patterns	Ultra Flood 180°
Color Temperature	2800K
Mounting Options	Standard Mount Feet or PEN (Pendant Mount)
Voltage	90-264V AC 127-370V DC
Wattage	10W
Operating Temperature	-40°C to +60°C
Vibration	15.6Grms
IP Rating	IP68, IP69K
Certifications / Ratings	EMC Emission: EN55022, EN61000-3-2, Class A, EN61000-3-3. EMC Immunity: EN55024, EN61000-4-2, 3, 4, 5, 6, 8, 11; light industry level (surge 2KV), criteria A
Short Circuit	Constant current limiting, recovers automatically after fault condition is removed
Lens	Polycarbonate Lens
Weight	2 lbs (0.9kg)

Part No.	Beam Angle	Voltage	Watts
LSGSM40180PH.2800K	180° Ultra Flood	90-264V AC 127-370V DC	10W



Authorised Importer and Master Distributor

