

# ECCO EW3100 Series

## Maintenance-free Life Expectancy



EW3109 - Length: 9" inches (228.6mm)



EW3120 - Length: 20" inches (508mm)



EW3132 - Length: 32" inches (812.8mm)

### Description

ECCO's single row utility bars offer long, maintenance-free life expectancy, low amp draw, and extremely bright white light output. Available in three lengths, each with a choice of two mounting options. These bars are an ideal choice for both commercial and recreational applications. Features include 12-24V DC operation, 5W LEDs, flood or combination flood/spot beam patterns, aluminum housing, polycarbonate lens, and a 5-year warranty.


### Features and Benefits

- 12-24 VDC
- Deutsch connector
- Built-in vent to prevent fogging
- High-intensity beam
- Flood or combination flood/spot beams
- Adjustable end or extrusion mount
- Aluminum heatsink housing and polycarbonate lens
- Temperature range: -40°F to 158°F (-40°C to 70°C)

### Tech Specs

Beam	Flood (EW3109) Flood / Spot Combo (EW3120) Flood / Spot Combo (EW3132)
Amps	0.8A @ 12V DC (EW3109) 1.8A @ 12V DC (EW3120) 3.0A @ 12V DC (EW3132)
rLumens	875 rLumens (EW3109) 2,175 rLumens (EW3120) 3,475 rLumens (EW3132)
Voltage	12-24V DC
Length	9" inches (228.6mm) (EW3109) 20" inches (508mm) (EW3120) 32" inches (812.8mm) (EW3132)
Approvals	CE, IP69K, RoHS
Warranty	5 Years

Part No.	Description
EW3109	Flood Beam, 12V DC, Length: 9" inches (228.6mm), 875 rLumens, 0.8A @ 12V DC
EW3120	Flood / Spot Combo Beam, 12V DC, Length: 20" inches (508mm), 2,175 rLumens, 1.8A @ 12V DC
EW3132	Flood / Spot Combo Beam, 12V DC, Length: 32" inches (812.8mm), 3,475 rLumens, 3.0A @ 12V DC

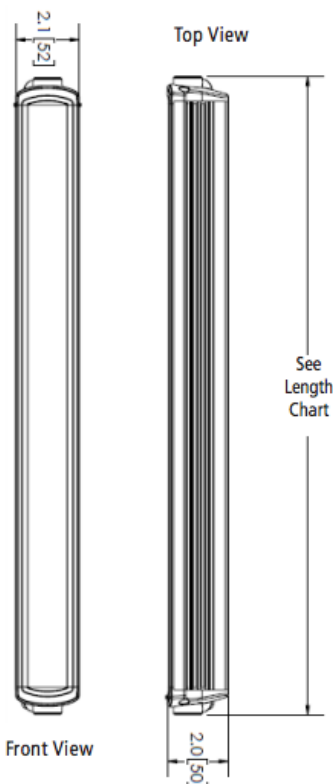

Authorised Importer and Master Distributor

