


# J.W. Speaker Model 893

## Compact 3" x 8" LED Work Light



Model 893 Anti-Glare

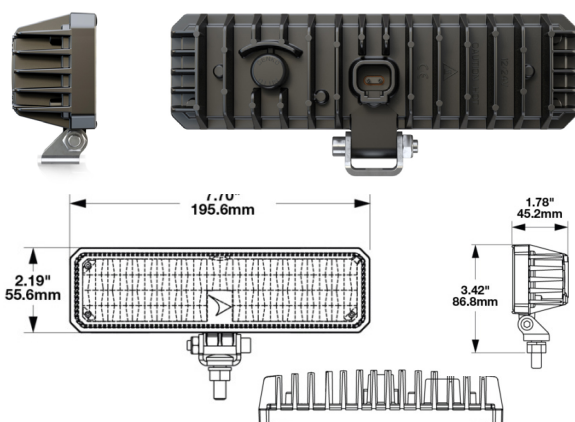

### Description

Move forward with confidence with the Model 893 LED Compact Work Light. This powerful LED work light projects a wide beam of light via custom lens optics producing 3,700 lumens in front of your vehicle for incredible visibility. Use it in agriculture, construction, mining, and even off-road environments to stay active, productive, and safer at all hours and in any weather.

Built with sturdy aluminium housing and an impact-resistant polycarbonate lens, the Model 893 shines brightest for crews in the harshest, most demanding worksites. The durable, pedestal-mounted and corrosion-resistant LED light fits easily on a wide range of work vehicles for nonstop productivity. Designed with thermal throttling protection for construction and agriculture applications, the Model 893 performs above the rest. Rated IP67 and IP69K, the Model 893 withstands bumps, thumps, and vibrations common when used in tough, weather-adverse sites.

### Features and Benefits

- LED compact 3" x 8" rectangular shape work light
- 3,700 effective lumens in a wide, flood beam pattern
- Rugged polycarbonate impact-resistant lens
- Sturdy black aluminium, corrosion-resistant housing
- Internal components fully encapsulated for moisture, vibration and corrosion protection

### Applications

Mining, construction, industrial, agriculture, rail-road, material handling, utility vehicles, specialty vehicles, automotive and off-road 4x4



### Tech Specs

Input Voltage	9-32V DC (1300671), 12-24V DC (1300811)
Operating Voltage	12-24V DC (1300671), 9-30V DC (1300811)
rLumens	7,120 lumens (1300671)
eLumens	3,700 lumens (1300671), 2300 lumens (1300811)
Candela Output	6230 (1300671), 7400 (1300811)
Nominal LED Color Temperature	5050 K (1300671), 1850 K (1300811)
Current Draw	4.5A @ 12V DC (Power) 1.8A @ 24V DC (Power)
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses (1300671)
IP Rating	IP67, IP69K
Standards Compliance	Buy America Standards, Eco Friendly, ECE Reg 10 (1300671), Tested to ECE Reg. 10 (Radiated Emissions Only) (1300671)
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	60 °C / 140 °F (1300671)
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Mating Connector	Deutsch DT06-2S-E003
Housing Material	Aluminium (1300671), Aluminium Die Cast (1300811)
Mounting Type	Pedestal
Weight	1.02 lbs / 0.46 kgs (1300671), 1.02 lbs / 0.46 kgs (1300811)
Dimensions (H x W x D)	70 x 196 x 45mm (2.76 x 7.72 x 1.77 inch)

### Part No. Description

1300671	Model 893 LED Compact Work Light, 12-24V, Pedestal Mount
1300811	Model 893 LED Compact Work Light, 12-24V LED Anti-Glare, Eco-Friendly, Pedestal Mount

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

Authorised Importer and Master Distributor

**APS USA**  
sales@aps-supply.com  
P: 1 619 263 4164

**APS Australia**  
sales.apsa@aps-supply.com  
P: 61 (8) 9302 2369 (WA)  
P: 61 (02) 4915 6781 (NSW)

**APS Colombia**  
ventascolombia@aps-supply.com  
T: 57 (4) 444 7275

**APS Chile**  
ventaschile@aps-supply.com  
T: 56 (2) 2948 8044

**APS Perú**  
ventasperu@aps-supply.com  
T: 56 (2) 2948 8044

**APS Indonesia**  
techcenter@aps-supply.com



APS Contact Page



aps-supply.com



APS Lighting & Safety