

Vision X 6" and 12" Surface Mount LED Scene Light



(WSL-9M)



(WSL-9M-AW)



(WSL-9M-RW)



(WSL-9M-W)



(WSL-18MW)



Description

Featuring the highest level of RFI and ingress protection the Vision X LED Scene Lights are guaranteed not to suffer water or dust ingress or interfere with radios and electrical equipment. Providing a broad beam pattern with fantastic, 5700°K color output making these lights seamless to work under.

The light is also designed so that when surface mounted it provides the optimum angle for lighting an area (40 degrees). The die cast housing combined with the hard coated polycarbonate lens ensure these scene lights will not fail even in the harshest conditions.

Applications


Mining Light Vehicles (LVs), Service Vehicles, Automotive, Off-road, 4x4, 4WDs, Drills, Dozers, Excavators, and Graders

Tech Specs

Raw Lumens	6" : 1,350 lm 12" : 2,700 lm
Watts	6" : 9W 12" : 18W
Amp Draw @ 12V	6" : 0.75A 12" : 1.5A
Beam	Wide Flood
Color Options	Black & White
Product LxWxH	6" : 7.36 x 1.85 x 1.65 12" : 12.54 x 2.60 x 3.39
Weight	2.0 lb / 2.3 lb (WSL-18M and WSL-18MW only)

Part No.	Description
WSL-9M	Vision X 6" Surface Mount LED Scene Work Light 9W 9-33V Black
WSL-9M-AW	Vision X 6" Surface Mount LED Dual Color Scene Light – White/Amber
WSL-9M-RW	Vision X 6" Surface Mount LED Dual Color Scene Light – White/Red
WSL-9MW	Vision X 6" Surface Mount LED Scene Work Light 9W 9-33V White
WSL-18M	Vision X 12" Surface Mount LED Scene Work Light 9W 9-33V Black
WSL-18MW	Vision X 12" Surface Mount LED Scene Work Light 9W 9-33V White

Applications

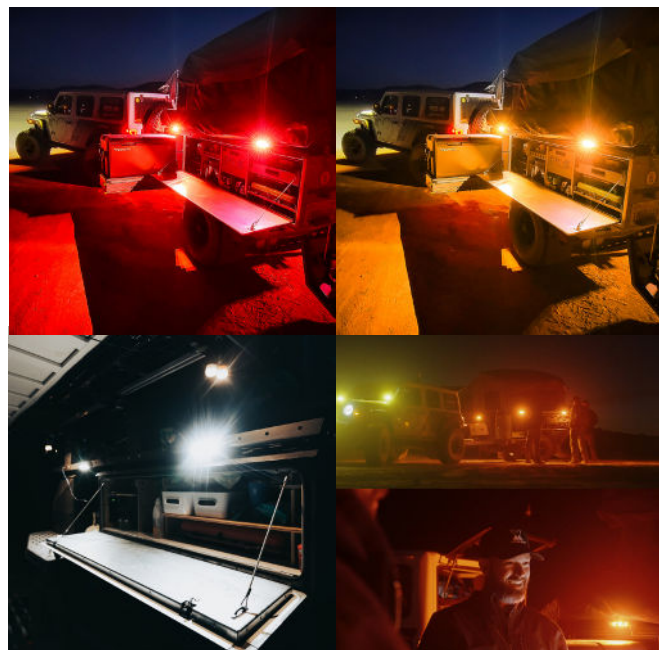

(WSL-18M)



Authorised Importer and Master Distributor

APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369 (WA)
P: 61 (02) 4915 6781 (NSW)

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



APS Contact Page