



J.W. Speaker Model 832 LED Auxiliary Lights




4" x 4" LED Auxiliary Lights

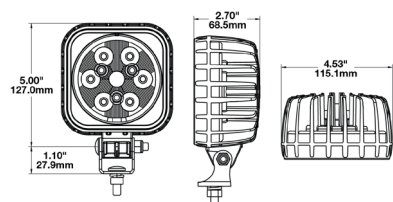

Mounting Options:

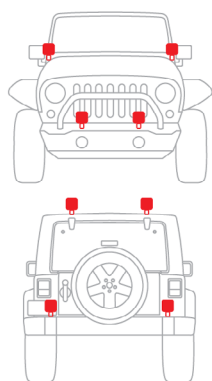

- A-Pillar
- Front Bumper
- Rooftop
- Rear Bumper



Description

Perfect for tight mounting areas, the Model 832 packs a comparable output to the Model 735, but in a smaller form factor. This 4" x 4" light features a UV-resistant polycarbonate lens and rugged die-cast aluminum housing which stands up to the rigors of everything from industrial job sites to off-roading.

Features and Benefits

- Also available in a heavy-duty XL Series version
- Multiple beam patterns available: Flood, Spot, or Trapezoid
- 24 Volt Versions are available for Theft Deterrence
- Comparable light output to the [Model 735 worklight](#)
- Die-Cast Aluminum Housing & impact-resistant Polycarbonate Lens provide rugged durability
- Super bright LEDs provide maximum visibility & increase safety
- IP69K seal rating to protect against dust & water
- Great for mounting in tight areas (less than 3" depth)

Applications

Agriculture, Automotive, Construction, Industrial, Material Handling, Mining, Off-Road 4x4, Powersports, Railroad, Specialty Vehicles, Truck & Bus

Tech Specs

Input Voltage	12-24V DC; 24V DC (1300611 and 1300621)
Operating Voltage	10-32V DC; 20-32V DC (1300611 and 1300621)
Current Draw	3.5A @ 12V DC, 1.75A @ 24V DC; 1.6A @ 24V DC (1300611 and 1300621)
Raw Lumen Output	3,900 lm
Effective Lumen Output	2,500 lm (1300161); 2,400 lm
Nominal LED Color Temperature	5700 K
Beam Pattern(s)	Forward Lighting - Spot (1300161); Trapezoid (1300171 and 1300611); Flood (1300181 and 1300621)
Shape	Square
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware	(x1) 5/16"-18 x 0.58" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Operating Temperature	-40 °C (-40 °F) – 65 °C (149 °F)
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Compliance / Certifications	1300161, 1300171, and 1300181: Buy America Standards, Eco Friendly, IEC IP69K, UL Recognized 1300611 and 1300621: Buy America Standards and Eco Friendly
Dimensions (H x W x D)	154.94 mm x 115.06 mm x 68.58 mm (6.1 in x 4.53 in x 2.7 in)
Product Weight	1.82 lbs (0.83 kgs)
Shipping Weight	2.00 lbs (0.91 kgs)

Part No. Description

1300161	J.W. Speaker Model 832 LED Auxiliary Lights 12-24V LED Auxiliary Light with Spot Beam Pattern
1300171	J.W. Speaker Model 832 LED Auxiliary Lights 12-24V LED Auxiliary Light with Trapezoid Beam Pattern
1300181	J.W. Speaker Model 832 LED Auxiliary Lights 12-24V LED Auxiliary Light with Flood Beam Pattern
1300611	J.W. Speaker Model 832 LED Auxiliary Lights 24V LED Auxiliary Light with Trapezoid Beam Pattern
1300621	J.W. Speaker Model 832 LED Auxiliary Lights 24V LED Auxiliary Light with Flood Beam Pattern



J.W. SPEAKER
 Engineered. Lighting. Solutions.

Authorised Importer and Master Distributor

APS USA
 sales@aps-supply.com
 P: 1 619 263 4164

APS Australia
 sales.apsa@aps-supply.com
 P: 61 (8) 9302 2369 (WA)
 P: 61 (02) 4915 6781 (NSW)

APS Colombia
 ventascolumbia@aps-supply.com
 T: 57 (4) 444 7275

APS Chile
 ventaschile@aps-supply.com
 T: 56 (2) 2948 8044

APS Perú
 ventasperu@aps-supply.com
 T: 56 (2) 2948 8044

APS Indonesia
 techcenter@aps-supply.com



APS Contact Page