


GROTE 61121 / 61131

Whitelight X-100 Dome Light

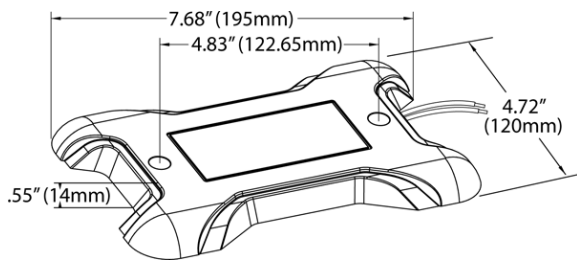

Description

The Grote 61121 and 61131 is one of the thinnest LED products on the market and is ideal for lighting the interiors of utility vehicles, fleet, refrigerated trucks, and heavy equipment. This light features a rugged, surface mountable profile, allowing for a variety of uses. It's versatile design means both wall or ceiling mounting is possible. The instant-on nature of LED's means no warm up time (between -40C to 85C) and can also be operated without problems in extreme temperatures such as refrigerated environments.

Features and Benefits

- 10-16V DC (Grote 61121), 18-30V DC (Grote 61131)
- Built-in thermal protection device
- Hermetically sealed for extreme durability (IP69 rated)
- Encapsulate potting for moisture and corrosion protection
- Fast installation with 2 self-tapping screws and no holes to cut
- Surface mountable – versatile design means both wall or ceiling mounting is possible

Applications

Interior lighting for utilities, fleet, refrigerated trucks, and heavy equipment

Tech Specs

Tech	LED
Current Draw	0.6A @ 12V DC (61121) 0.3A @ 24V (61131)
Voltage	10-16V DC (61121) 18-30V (61131)
Protection	Built-in thermal protection
Lifespan	50,000 hours
IP Rating	IP69
Finish	Clear
Housing	Polycarbonate
Installation	2 self-tapping screws and no holes to cut
Mounting	Surface Mounting
Dimensions (DxWxH)	4.72x7.68x0.55" (120x195x14mm)

Part No.	Description
61121	Grote 61121 – WhiteLight X-100 Dome Light, 10-16V DC multi
61131	Grote 61131 – WhiteLight X-100 Dome Light, 18-30V DC multi

Authorised Importer and Master Distributor

