


# Preco Multi Frequency MF200 Series

## Providing A Solution To Potential Noise Pollution



**SRS**  
SHORT RANGE SOUND

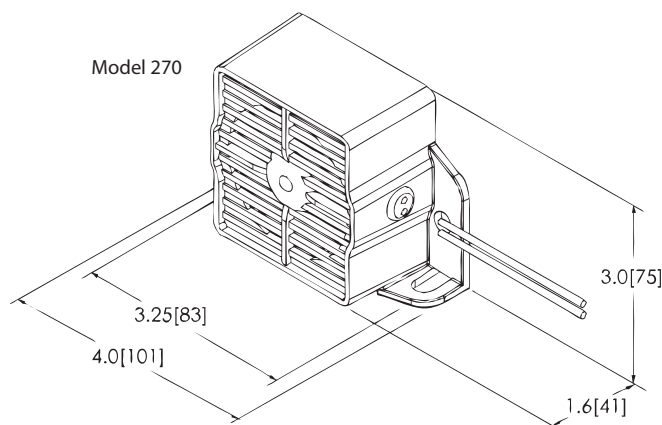

### Description

The Multi-Frequency back-up alarm provides a solution to potential noise pollution created by back-up alarms in confined or densely populated work areas. The Multi-Frequency alarm maintains a safe warning signal for those in the danger zone of backing vehicles while minimizing disturbance to work site neighbors.

The Multi-Frequency alarm operates by emitting sound at multiple frequencies attenuated above 4000Hz so that the sound is perceived to dissipate more quickly than a conventional pure-tone alarm. In addition, driver technology used in the MF102 and MF107 models extends the life expectancy of the alarm, so much so, that a vehicle life warranty is offered.

### Features and Benefits

- Universal mounting bracket maximizes location options
- Lead Wire
- Sealed in epoxy for protection against dust, moisture and vibration

### Tech Specs

Model	MF220 MF240
Voltage	12 - 24V DC
Type	Back-up Alarms
Amps	0.3 (MF220) 1.0 (MF240)
Decibels	87 (MF220) 97 (MF240)
Connection	2-16 AWG Lead Wire (MF220, MF240)
Temperature Range	-40°F to +185°F (-40°C to +85°C)
Approvals	SAE J994 ECE R10, AMECA
Warranty	MF220, MF240 • 2 Year Warranty

Part No.	Description
PRE-MF240	Preco Back-up Alarm SRS Multi Frequency Series 97DB Self Adj 12-24V
PRE-MF220	Preco Back-up Alarm SRS Multi Frequency Series 87DB Self Adj 12-24V

Authorised Importer and Master Distributor

