


ECCO ED3040 / ED3060 Light

Stop-Tail-Turn-Reverse and Warning Light Combo

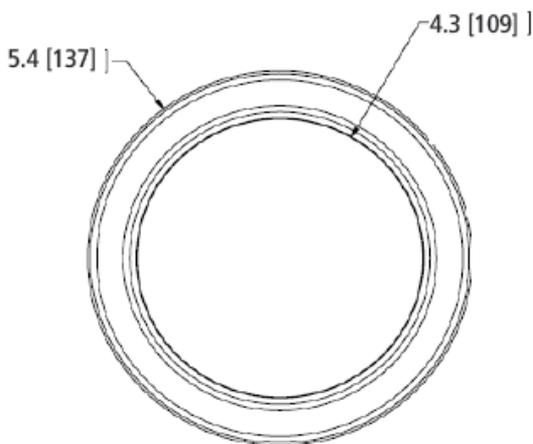

Description

The back of service vehicles and trailers must have maximum visibility for ongoing safety both on and off the road and worksite. Usually this is done with a myriad of lights – meaning cutting additional holes in the panels. Did you know there is a better way! Introducing one of the most versatile multifunctional LED tail lights on the market. The ECCO ED3040 4 inch round and the ED3060 6 inch oval covers the most common size you will find for easy retrofit and install on service vehicles and trailers. These multifunction tail lights feature a number of lights in the one fixture, including; stop-tail-turn lights; steady-burn red and white override lights for reverse or flood light; and a dual-colour directional warning light with 69 flash patterns. Features 12-24V DC multivolt, SAE Class I compliance, and IP67 and IP69K protection. Installation is a breeze with a female PL3 or AMP connector and grommet mount or a flange mount option for antitheft capabilities. This light is perfectly ideal for: work trucks, utilities and service vehicles in municipalities and some heavy equipment in mining and construction. Comes with a 5 year no-hassle warranty for peace of mind.

Features and Benefits

- High output LEDs offer low maintenance, long life and low current consumption
- Ultrasonically sealed housing
- Grommet mount included to fit in standard 4" rounded or 6" oval tail light applications
- Flange mount available with optional accessories
- Vibration and shock resistant construction
- Connector for Ground, Stop/Turn, Tail


Application

Fleet vehicles and trucks

Tech Specs

Voltage	12-24V DC
Shape	4" inch (Round LED) (ED3040AW, ED3040AW-AMP3S) 6" inch (Oval LED) (ED3060AW, ED3060AW-AMP3S)
Colour	Red LED
Flash Patterns	69
Connector	PL3 (ED3040AW, ED3060AW), AMP (ED3040AW-AMP3S, ED3060AW-AMP3S)
Lens	Clear Center: Reverse/Warning, Red Perimeter: Stop-Turn-Tail
Temperature Range	-22°F to +122°F (-30°C to +50°C)
Standards Compliances	SAE Class I, DOT, CA T13, R10, IP67, ROHS
Warranty	5 Years

Part No.	Description
ED3040AW	4" inch round LED, 12-24V DC, PL3 Connector, Clear Center: Reverse/Warning, Red Perimeter: Stop-Turn-Tail Lens
ED3040AW-AMP3S	4" inch round LED, 12-24V DC, AMP Connector, Clear Center: Reverse/Warning, Red Perimeter: Stop-Turn-Tail Lens
ED3060AW	6" inch oval LED, 12-24V DC, PL3 Connector, Clear Center: Reverse/Warning, Red Perimeter: Stop-Turn-Tail Lens
ED3060AW-AMP3S	6" inch oval LED, 12-24V DC, AMP Connector, Clear Center: Reverse/Warning, Red Perimeter: Stop-Turn-Tail Lens

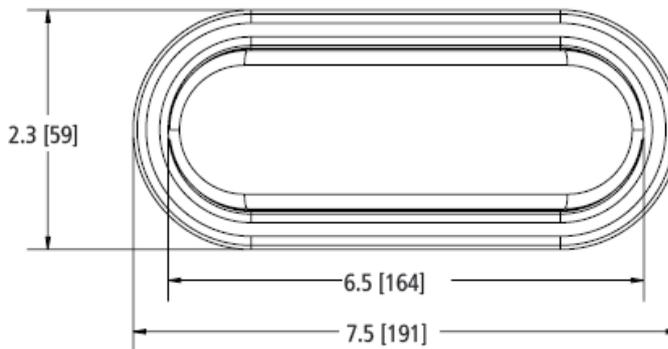

Authorised Importer and Master Distributor

